


## IP Outdoor Camera

1080P 2.0MP

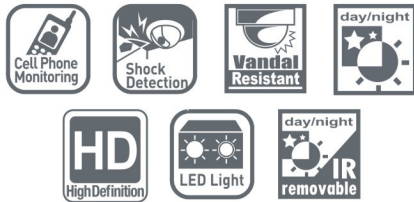

| Specifications           | AIS-IP632MV (POE Type)                            |
|--------------------------|---|
| Image Compression Format | H.264   |
| Image sensor             | SONY IMX 322 CMOS                                 |
| Lens                     | 2 Mega pixel lens                                 |
| Mini illumination        | 0.6Lux@ F1.2 ( color), 0.08 Lux@F1.2 (B/W)        |
| Vedio resolutions        | 1920* 1080  |
| Frame rate               | 25/30 FPS   |
| streams                  | 0.1Mbps – 8 Mbps                                  |
| Motion Detect            | Yes   |
| Alarm Event              | Email / Picture                                   |
| IR-CUT                   | yes   |
| Lens                     | 2.8- 12mm 2 Mega pixels                           |
| IR Range                 | 30 meters IR distance                             |
| Double streams           | Support   |
| Safety                   | Password protection, User management system       |
| Network Interface        | RJ-45 10- 100 Base T                              |
| Network Protocol         | TCP/UDP/IP/HTTP/RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP |
| ONVIF                    | Support   |
| Working Condition        | 0°C – 45°C (32°F – 133°F), 10% - 90%PH            |
| power                    | Output:12VDC/1A; Input:100–240VAC, 50–60Hz        |

### Main Features

- IP Waterproof Camera
- SONY IMX322 CMOS
- HI silicon Hi3516C High performance DSP
- H.264 video compression, support dual stream
- Board Lens 3.6mm 2 Mega pixels
- Built-in Web Server makes it possible for users to visit camera through IE browser,
- Adjust the stream and frame rate according to the bandwidth
- Support motion detection
- Support self-connection to the internet when disconnection happens
- Support 8 users to visit the camera at the same time
- Support remote system upgrade function
- Compatible SDK and client software
- Support IR-CUT
- Support ONVIF
- Support POE