

## EXIT LIGHTING SERIES




MODEL NO: CFS-EXT300L, CFS-EXT300R, CFS-EXT300LR, CFS-EXT300D

Alco provides a complete range of exit and emergency lighting as an integral part of Fire Detection System, which has a number of varieties in terms of signage.

Our Exit and Emergency lights consist of a conventional indication sign and specially designed to be used in different situations in order to indicate with accuracy.

### TECHNICAL FEATURES:

- Lighting Source: **Led**
- Lighting Wattage: **6w**
- Backup Time: **Upto 90 Minutes**
- Power Source: **Ni-cd (6v, 2.8ah)**
- Unit Size: **270 x 310 x 75(mm)**

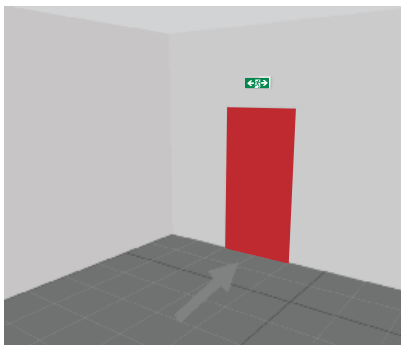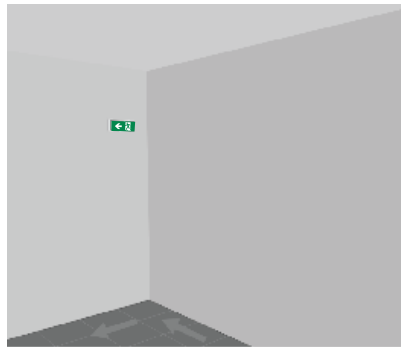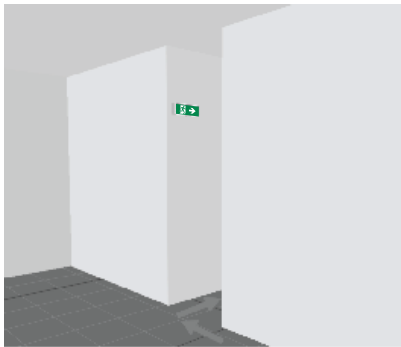

\* Different Arrow Option Available



Retail



Education



Hospital



Restaurant



Office



Hotel



Factory/  
Warehouse



Easy to Install  
Feature

\*Models may vary from time to time due to continuous improvement in product design, features, technology and stability for a better user experience.

**TECHNICAL FEATURES:**

MODEL NO: CFS-EXT301

- Voltage: **220-240V 50 / 60HZ.**
- AC Power: **3.5w MAX**
- Battery: **Ni-Cad 4.8v / 650mAH**
- Emergency Duration: **90 Minutes**
- Lighting Source: **14PCS, SMD 2835**  
LED, CCT 6000K for LED escape sign.
- Test Facility: Auto Test (*Self Test and Self Diagnostic*) or CAN Bus Control.

**TECHNICAL FEATURES:**


MODEL NO: CFS-EXT302

- Voltage: **220 - 240V 50 / 60HZ.**
- AC Power: **3.5w MAX.**
- Battery: **Ni - Cad 4.8 V / 650 mAH.**
- Emergency Duration: **3 hour.**
- Lighting Source: **14PCS, SMD 2835**  
LED, CCT 6000K for LED escape sign.
- Test Facility: Auto test (*self test and self diagnostic*) or CAN BUS control.

**TECHNICAL FEATURES:**

MODEL NO: CFS-EXT303

- LED **120 / 347V AC** input.
- Injection moulded thermoplastic ABS housing.
- Innovative, snap-together design.
- Wall, side or ceiling mounting.
- Battery backup for 3 hours emergency duration.
- **24 hours** Charging Time.
- Battery overcharge protection.
- Charging LED indicator and push to test button.
- Working Temperature: **-10 - 50°C.**
- Working Humidity: **<90%.**
- Used in **Commercial / Residential** areas.

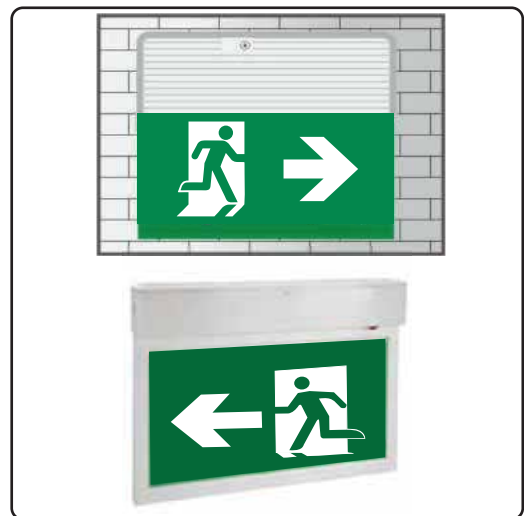\* **Different Arrow Option Available**

Retail



Education



Hospital



Restaurant



Office



Hotel

Factory/  
WarehouseEasy to Install  
Feature

\*Models may vary from time to time due to continuous improvement in product design, features, technology and stability for a better user experience.