


H.265 + WEATHER-PROOF DOME AI LITE CAMERA (2/5 MP)

AI / 140dB WDR / 0.002Lux Ultra Low-light / 60fps / IP66 / IP67 / IK10 / PoE

ONVIF | G | Q | S | T

**KEY FEATURE**


- AI Video Analytics
- Advanced Heat Map
- Face Detection Function
- Real-Time People Counting
- Advanced Built-in Microphone
- Reliable Anti-Vibration Performance

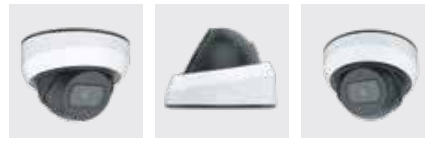


MODEL	AIS-NC2975-PD / AIS-MSC2975(PD/PA/PC)	AIS-NC5375-PD / AIS-MSC5375(PD/PA/PC)
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Min.Illumination	Color: 0.002Lux@F.12 0.005Lux@F1.6	Color: 0.005Lux@f.12 0.008Lux@F1.6
WDR	140dB Super WDR	Super WDR 120dB
Lens	2.8mm/4mm/6mm @F1.6	2.8mm/4mm/6mm @F1.6
Mount	M12	M12
Field of View	H111°/D128°/V61°(2.8mm)	H105°/D131°/V78°(2.8mm)
Shutter Time	1/100000s~1s	1/100000s~1s
IR Distance	Up to 25m	Up to 25m
Day & Night	Day/Night/Auto/Customize/Schedule	Day/Night/Auto/Customize/Schedule
S / N	>55dB	>55dB
Max. Image Resolution	60fps@(1920 x 1080)	30fps@(2592 x 1944)
Primary Stream	30fps@(1920x1080, 1280x960, 1280x720, 704x576)	
Face Detection	Detect and Capture Faces, Get Real-Time Snapshots	
Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG
Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)	
Audio Compression	G.711/AAC/G.722/G.726	G.711/AAC/G.722/G.726
Ethernet	1*RJ45 10M/100M Ethernet Port	
People Counting	Count the number of people entering or exiting, up to 4 detection areas for regional people counting	
Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour,SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL	
Storage	NAS(Support NFS, SMB/CIFS); Support microSD/SDHC/SDXC Card Local Storage upto 256G (Optional)	
Advanced Function	Heat Map, Privacy Masking, BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, EIS, IP Address Filtering	
Audio I/O	1/1 (Multi-interface Version)	1/1 (Multi-interface Version)
Event Trigger	Motion Detection, Network Disconnection, etc.	
Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.	
Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection	
System Compatibility	ONVIF Profile G & Q & S & T	ONVIF Profile G & Q & S & T
Working Temperature	-40°C ~ 60°C	-40°C ~ 60°C
Working Humidity	0~90%(Non-condensing)	
Power Supply	PoE (802.3af)	
Power Consumption	2.5W MAX	
Housing	IP67/IK10	IP67/IK10
Audio	Built-in Microphone	
Weight	410g (Cable Out Version)	600g (Junction Box Version)
Dimensions	Φ106mmX76.5mm (Cable Out Version) / Φ108mmX96.5mm (Junction Box Version)	

STRUCTURE DIAGRAMS

CABLE OUT VERSION

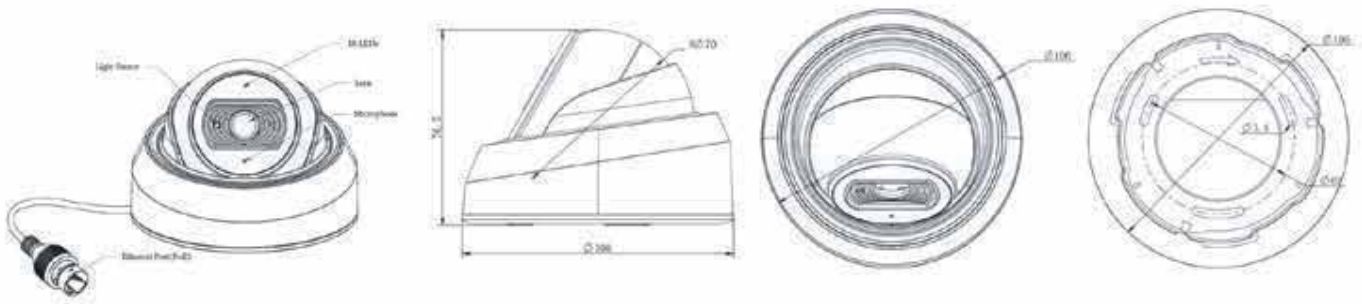

JUNCTION BOX VERSION

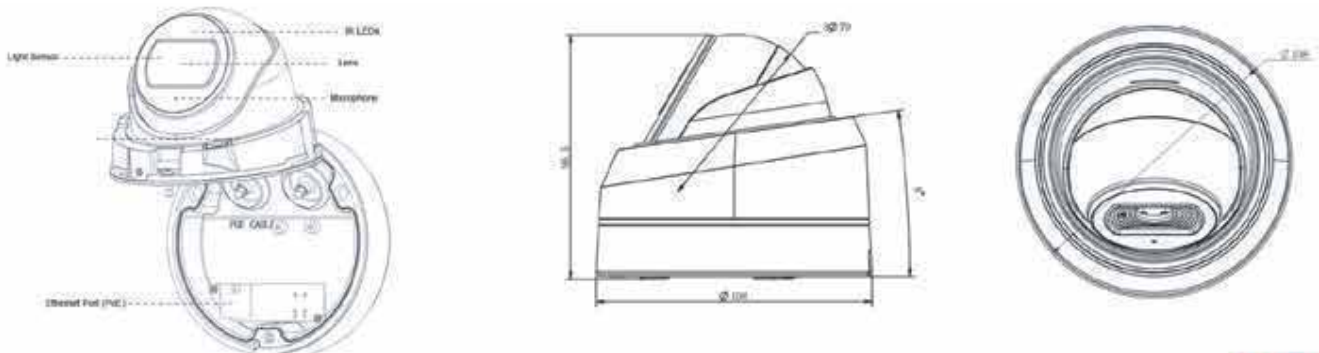

ACCESSORIES SUPPORT

AIS-A01 Pole Mount

Weight: 720g
Dimensions: 170*51.5*152.6mm



AIS-A02 Internal Corner Bracket

Weight: 540g
Dimensions: 170*23.2*205.3mm



AIS-A03 External Corner Bracket

Weight: 900g
Dimensions: 170*152.6*76.3mm



AIS-A71 Wall Mount

Weight: 530g
Dimensions: 162-124-78mm



AIS-A73 Adapter Plate

Weight: 28g
Dimensions: 115*122.5*10mm

