ALARM SOUNDER

MODEL NO: CFS-AB300, CFS-AB301

DESCRIPTION:

Alco Alarm Sounder has a conventional physical designed and an advance design with an in built LED Light. It provides high volume indication bell in case of emergency.

The Alarm Sounder is integrated with the Alco fire alarm control Panel, which can be further referred in order to locate the effected zone(s). The **AB300** is suitable for connection with 2 wire and 4 wire Fire Detection and Alarm Systems. AB300 will operate with both addressable and *Conventional Fire detection Control* and indicating equipment.




FEATURES:

Operational Voltage	24 VDC
Current	200mA
Output Sound	110 dB
Colour	Red
LED Indicator	Red

TECHNICAL FEATURES:

- Red body available for alarm device.
- Operates when the supply voltage is connected to the device.
- Compatible with relay outouts form control and indicating equipment, or form an output module connected to addressable alarm circuit wiring.
- DC 24 V operation.
- Loud sounder output of 85 dB at 1M.
- Long-life LEDs.
- Zero current load in quiescent condition.

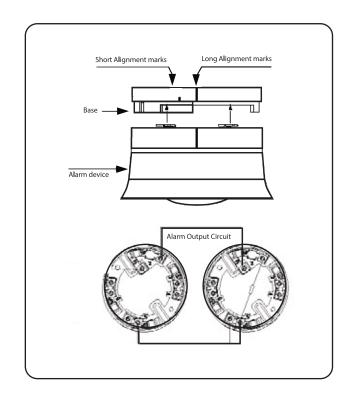























*Models may vary from time to time due to continuous improvement in product design, features, technology and stability for a better user experience.